







COMPANIES WORLDWIDE



20 SALES AREAS



57 EXPORT COUNTRIES

















AVERAGE PRODUCTION ALUMINIUM BILLETS



PRODUCTION

50 000 TONS OF ALUMINIUM BILLETS LOW CARBON LINE

EUROPEAN AVERAGE

* - average global primary carbon footprint emissions aluminium





670 TONS CO₂ ALUPROF SA





- Partnership with the UN Global Compact, an initiative dedicated to sustainable development and follows the pioneering Global Reporting Initiative path, promoting reporting standards in sustainable development
- Management in accordance to ISO 14001
- Membership in the World Green Building Council
- Passive Building Ambassador
- ─ Holder of Cradle to Cradle Certificate™
- ALUPROF introduced a range of pro-ecological initiatives, including an electronic invoicing workflow system to reduce the use of paper
- ALUPROF is working to reduce its carbon footprint by 15% by 2025
- ALUPROF's aluminium use is 65% recycled material

HIGHEST QUALITY EUROPEAN PRODUCTS





























THE WORLD'S HIGHEST STANDARDS

Aluprof constantly attaches great importance to continuous development and maintaining the highest level of its products and services. Each employee is obliged to maintain high quality. The process begins with suppliers, i.e. with high-quality components, from which systems are made. Innovative technologies and modern machine park is guaranteed by solid and durable products and customer satisfaction. It is also due to the creative work of the design department. Aluprof products are tested in many different laboratories globally.

HURICANE TESTS / FLORIDA BUILDING CODE TAS 201-94, TAS 202-94, TAS 203-94

CHARACTERISTIC	MB-37 SLIDE STORM		MB-45			MB-79N			MB-SR50N			
Air Infiltration per ASTM E283 In accordance with TAS 202-94	0.30 cfm/ft²		<0.01 cfm/ft²				<0.01 cfm/ft² / <0.02 cfm/ft²			<0.01 cfm/ft²		
Water Penetration Resistance per ASTM E331 In accordance with TAS 202-94	12 psf		9 psf - Passed / No water penetration 13,5 psf - Passed / No water penetration 21 psf - Passed / No water penetration				15 psf - Passed / No water penetration 21 psf - Passed / No water penetration			9 psf - Passed / No water penetration 13,5 psf - Passed / No water penetration		
Static Air Pressure per ASTM E330 in accordance with TAS 202-94	Designed load pressure	±60 psf	Designed load pressure	±60 psf	±90 psf	±140 psf	Designed load pressure	±100 psf	±140 psf	Designed load pressure	±60 psf	±90 psf
	Overload / Structiral Load Pressure	±90 psf	Overload / Structiral Load Pressure	±90 psf	±135 psf	±210 psf	Overload / Structiral Load Pressure	±150 psf	±210 psf	Overload / Structiral Load Pressure	±90 psf	±135 psf
Forced Entry Resistance per ASTM F588 In accordance with TAS 202-94	Passed - Grade 10											

Impacts rejected without allowing penetration

and the product shows no resultatnt failure or distress.

USA TESTS - FACADES / NCTL

CHARACTERISTIC	MB-SR50N / MB-SR60N						
Air infiltration 299 Pa (6.24psf)	0.05 L/s/m² (0.01 cfm/ft² measured) Prior to and After Design Load						
Water Penetration Resistance	718 Pa (15.0 psf)*						
Design Pressure	±2873 Pa (±60.0 psf)						
Uniform Load Structural Test	±4309 Pa (±90.0 psf)						

USA TESTS - DOORS AND WINDOWS / NCTL

Large Missile Impact / Pressure Loading

In accordance with TAS 201-94

CHARACTERISTIC	мв-7оні	MB-70HI CASEMENT	MB-86	MB-86 US	MB-86 SE	MB-86 WW	MB-SLIMLINE	MB-FERROLINE	MB-77HS HI AS	MB-77HS HI ES	MB-SKYLINE
Design Pressure	±2880 Pa (±60.15 psf)	±2880 Pa (±60.15 psf)	±2880 Pa (±60.15 psf)	±2880 Pa (±60.15 psf)	±2880 Pa (±60.15 psf)	±2880 Pa (±60.15 psf)	±2880 Pa (±60.15 psf)	±2880 Pa (±60.15 psf)	±2400 Pa (±50.13 psf)	±1436 Pa (±30.0 psf)	±2400 Pa (±50.13 psf)
Air infiltration	0.1 L/s/m² (0.02 cfm/ft²)*	0.2 L/s/m² (0.03 cfm/ft²)** 0.1 L/s/m² (0.02 cfm/ft²)***	0.1 L/s/m ² (0.01 cfm/ft ²)** 0.1 L/s/m ² (<0.01 cfm/ft ²)*** 0.4 L/s/m ² (0.08 cfm/ft ²)***	0.1 L/s/m² (0.02 cfm/ft²)** *** 0.2 L/s/m² (0.03 cfm/ft²)***	0.1 L/s/m² (0.01 cfm/ft²)** ***	0.1 L/s/m² (0.01 cfm/ft²)*** 0.5 L/s/m² (0.10 cfm/ft²)***	0.1 L/s/m² (0.02 cfm/ft²)*	0.2 L/s/m² (0.03 cfm/ft²)** 0.2 L/s/m² (0.04 cfm/ft²)***	0.2 L/s/m ² (0.03 cfm/ft ²)** 0.3 L/s/m ² (0.05 cfm/ft ²)*** 0.9 L/s/m ² (0.18 cfm/ft ²)***	75 Pa (1.57 psf) 0.1 L/s/m² (0.01 cfm/ft²)* 299 Pa (6.24 psf) 0.5 L/s/m² (0.09 cfm/ft²)** 0.7 L/s/m² (0.14 cfm/ft²)***	0.6 L/s/m² (0.011 cfm/ft²)
Water Penetration Resistance Test Pressure	720 Pa (15.04 psf)*	720 Pa (15.04 psf)*	720 Pa (15.04 psf)*	720 Pa (15.04 psf)*	720 Pa (15.04 psf)** ***	720 Pa (15.04 psf)** 580 Pa (12.11 psf)***	720 Pa (15.04 psf)*	720 Pa (15.04 psf)*	480 Pa (10.03 psf)*	287 Pa (6.0 psf)	360 Pa (7,52 psf)
Uniform Load Structural Test Pressure	±4320 Pa (90.23 psf)	±4320 Pa (90.23 psf)	±4320 Pa (90.23 psf)	±4320 Pa (90.23 psf)	±4320 Pa (90.23 psf)	±4320 Pa (90.20 psf)	±4320 Pa (90.23 psf)	±4320 Pa (90.23 psf)	3600 Pa (75.19 psf)	±2155 Pa (±45.0 psf)	±3600 Pa (75.19 psf)



BESPOKE SOLUTIONS FOR COMMERCIAL FACILITIES WITH REFERENCES







STRUCTURAL UNITIZED FAÇADE



MB-SE80SG

Structural Performance Test

The LIC MARRIOTT is 348 ft high and has 31 stories. Designed with the MB-SE80 SG unitized façade, the building uses a fully structural, four-edge glazing system. In order to meet the project requirements, the design was accordingly modified: changes included sealing system and profiles' structure. This helped to satisfy the required resistance to seismic movements and improved the façade's tightness performance. As regards the bespoke top-hung awning casements and angle joints, they allowed fabrication of the characteristic, "concave portion" of the façade. As for compensation of tectonic movements, the construction enables to increase up to ± 13 mm ($\frac{1}{2}$ ") the tolerance of mutual vertical movements of the segments. The MB-SE80 SG also comes with special anchors designed for the façade maintenance personnel.









The MB-SE80 SG CW system, designed for the purpose of constructing Sky View Parc complex of apartment buildings, is intended for execution of curtain walls of suspended and filling type. This unitized façade may be mounted without having to use any scaffolding. On the outside it gives the effect of a uniform glass surface, divided with vertical gaps 7/8" wide and horizontal gaps 1 3/16" wide. Load-bearing sections are 3 1/8" wide and IGU structurally glazed using SSG technology. The idea of independently joined segments of the façade resulted in forming vertical and horizontal expansion joints, which ensure proper performance of the structure. Built in the MB-SE80 SG CW system, the structure features appropriate tightness parameters, high thermal and acoustic performance as well as the assumed resistance to seismic shocks.







Sky View Parc

♦ New York









Airborne Sound Transmission Loss

STRUCTURAL UNITIZED FAÇADE MB-SE80 SG WW

Sky View Parc is a complex of three apartment buildings, each of which is 17-story high. The surface of the elevation takes up 266,000 sq ft. Two types of façade systems were designed for the purpose of this project. Most of the surface is covered by the segmentbased wall system MB-SE80 SG WW, which on the outside produces an effect of a uniform glazed belt stretched between the stories of the building, divided with vertical gaps 22 mm (%") wide. The load-bearing sections of the system are 80 mm (3-1/4") wide and glass panels are glued onto them with structural silicone in the SSG technology.

The structure comes in two options of the finish - with and without a closing section. Angular connections may also be applied to the structure and the frames of opening elements may be filled with outside opening windows as well as doors of the MB-70HI Casement system. High sound insulation performance compliant with the requirements of the OITC 35 rating system is yet another characteristic feature of the structure.





61 Ninth Avenue

New York





MULLION-TRANSOM WALL SYSTEM



MB-SR60NY is a Stick-Build curtain wall system designed specifically for the American market. Insulating glass units are mechanically fixed by means of the glazing bars screwed to the supporting structure with screws. This façade is available both in the basic version and in the Fire Rated for 60 min version. Both versions can be combined without apparent differences in the façade. Constructional solutions of the façade allow to aesthetically combine glazed walls with non-transparent panels finished with metal sheet, and with concrete panels. The system has been successfully tested at NCTL.

The 61 Ninth Avenue is the first project to use MB-SR60NY system. The building has 12 floors and a surface area of over 67,800 sq ft. Constructional solutions used in the structure will provide greater freedom in the arrangement of the building space, and numerous terraces will merge the inside with the outside. MB-SR60NY-based glazed aluminum curtain walls will have a surface area of 43,500 sq ft, of which over 1/4 will be fire-rated constructions.



625 Fulton Street

New York



Acoustic Performance Test Report

WINDOW WALL SYSTEM



MB-79N WW





MB-79N WW – Window Wall system has been designed specifically for the American market. It allows to fabricate lightweight window wall panels. Panels structure consist of modules (segments) fabricated entirely in the manufacturing facility. The window wall panels use head and sill receptor system commonly used in window wall application across the USA. Head receptor allows to accommodate various movements provided as project design criteria such as dead load, live load, concrete slab deflection and operate within the ± 1" tolerance.

One of the building this system was used is residential building located at 625 Fulton Street, Brooklyn, NY. It is 36-story mixed-use tower in Downtown Brooklyn. The 500-foot-tall tower includes 1,098 residential units and 26,000 sf of retail space.









125 Greenwich is 278m (912 feet) high, and has 88 levels. As provided for in the architectural design, the external wall has rounded corners, providing the residents dwellers with a magnificent panoramic view to the city. 125 Greenwich Street-dedicated unitized curtain wall system MB-SE98 SG enables to build fully glazed constructions from the outside, and the glass is attached by means of structural sealant using the SSG technology. Typical dimensions for this structure are: width of mullions & transoms 98mm (3.85"), vertical expansion joint 16mm (0.62"), horizontal expansion joint 42mm (1.65"). Horizontal expansion joint has a large movement tolerance range - up to ±27.4 mm (1.08").

MB-SE98 SG system has two types of mullions that provide the ability to fabricate basic types of façade segments plus the segments with a special vertical profile for attaching a transport platform. Also, the system has two types of motorized and manual parallel opening windows.







Brooklyn Navy Yard

Dock. 72

• New York



STRUCTURAL UNITIZED FAÇADE



MB-SE90 SG

The MB-SE90 SG system is a unitized system designed in line with the standards of the American market. The structure allows erection of all-glass façades as seen on the outside. Glass panels are fitted with structural bonding system in the SSG technology. The production technology of segments makes it possible to apply the techniques most popular in the United States and allows for integration of the wall with concrete panels. The office building Brooklyn Navy Yard, Dock 72 is the first building in the construction of which the MB-SE90 SG system is applied. This 17-story building featuring the floor are of 675,000 square feet will come with numerous amenities addressed to its users, such as specialty food vendors,a wellness center, bicycle parking racks, a viewing terrace and a basketball court.
















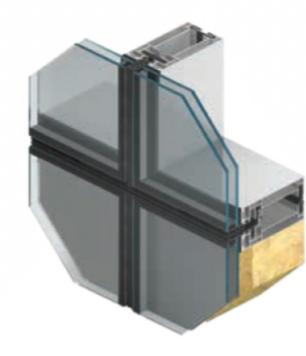

BALCONY WINDOWS AND DOORS MB-70HI CASEMENT

Designed especially for the 325 LEX building, the MB-70HI awning Casement is used to fabricate outward openable, highly insulated balcony doors. It features profiles of an appropriate stiffness that enables the fabrication of large-sized constructions. Thanks to its shape, the door frame can be mounted to the façade. The MB-70HI Casement system includes both single and double leaf door with a "mobile mullion".





Structural Performance Test





ICE Krakow
Congress Centre

♥ Cracow



MB-SR50N/MB-SR50NHI+

MB-SR50N facade structures with visible narrow dividing lines, ensure durability and strength of the structure. Thanks rich profiles offer, architects and designers can implement even the most bold ideas in the field of aluminum and glass structures.

In order to achieve optimal thermal and acoustic insulation in the system MB-SR50N HI+ uses PE material insulator which gives very good thermal insulation U_f from 0.59 W/(m²K). The MB-SR50N HI+ system is certified by the PHI Darmstadt Institute in the highest A+ class, which confirms that it is made there, structures can be used in the construction of facilities passive.

Aluprof obtained positive results of **hurricane tests** conducted for the **MB-SR50N** system in **accordance with ASTM** guidelines and **Florida Building Code** TAS 201-94, TAS 202-94 and TAS 203-94.







Structural Performance Test

Mennica LegacyTower

♥ Warsaw



STICK CURTAIN WALL SYSTEM



The advantages of MB-SR60N system are, good technical parameters, freedom of geometry, and diversity of operable elements within the façade. In particular the version with increased thermal insulation is noteworthy MB-SR60N HI+, which uses special insulators. Available there is also a version without visible masking strips MB-SR60N EFFEKT.





SOLUTIONS
FOR RESIDENTIAL BUILDINGS
TESTED FOR THE MARKET
OF THE USA

ALUPROF = 33



Structural Performance Test

SLIM PROFILE WINDOW MB-SLIMLINE

With its very small-in-width aluminum profiles visible from the outside of the structure, MB-SLIMLINE windows allow to provide operable windows in two variants, visible and invisible (zero slightline window) profiles (SG) from the outside of the envelope. When invisible lights are used, the appearance of openable and fixed units is almost identical, which makes the entire structure look refined in every detail.

Due to the structure of external profiles, this system can also greatly style windows, made of steel profiles and maintain a similar appearance from the outside of the envelope while significantly increasing thermal performance of the partition.







SLIM PROFILE WINDOW MB-FERROLINE

MB-FERROLINE window with a thermal break is perfect for the renovation of historic buildings and helps to preserve the appropriate appearance of windows that can imitate traditional steel windows, while ensuring very good technical performance of the structure. Different styles of open-in and open-out windows and fixed windows are available. They are characterized by high resistance and very high performance in terms of water and air tightness, thermal and sound insulation.

Building on proven solutions and offering a whole range of appropriately shaped, new profiles, MB-FERROLINE allows to produce systems that fit the appearance of the building.





SLIDING DOOR WITH INVISIBLE FRAME



New build or existing homes can benefit from the MB-SKYLINE SYSTEM to flood living spaces with natural light and space. The system is threshold-free and ensures a seamless indoor/outdoor connection. The slim construction with narrow profiles is lightweight and delicate, giving the impression of an almost uniform glazing, delicately divided with lines, and perfectly fits into the luxury design.

MB-SKYLINE-based sliding door provides the user with a comfortable, threshold-free passage and ensures the connection of indoor and out-door living spaces.



Large size of the structure

more than 19 feet wide



LIFT & SLIDE DOOR SYSTEM



Glazed walls look extremely elegant, modern and give the interior its unique character while making it brighter and bigger. On the ground floor of the family house, it will allow to watch the garden change with the seasons. At higher floors, the occupants can enjoy panoramic views on the city or on the surrounding areas. It's a solution for the living room or bedroom that can also connect the home space with terrace or balcony.







LIFT & SLIDE DOOR/CORNER SYSTEM



MB-77HS

Lift & Slide Door/Corner system is the perfect integrating element that connects rooms or conservatories with outdoor spaces. It provides a convenient exit from the balcony, terrace or garden. Another advantage of the MB-77HS system is that it makes the natural environment a part of your daily experience and, when in open position, it does not take up space inside the room for even greater comfort of use.

With its first class performance, MB-77HS system meets all the requirements for this product family. The system allows to manufacture exclusive, largesized doors with double or triple glazing units, while the materials and the used technical solutions help to achieve a high degree of thermal and noise protection.

Keep your home

warm for years





WINDOW & DOOR SYSTEM



MB-86/MB-86N SI

Highly resistant profiles of the MB-86 / MB-86N SI Series allow to produce large size, heavy constructions while the wide range of profiles guarantees the desired aesthetics and resistance. Our wide range of glass options allows to use all common types of triple glazing, sound insulating or burglar-resistant units. There is also a version of the windows witha hidden sash MB-86US.






An innovative

window and door system







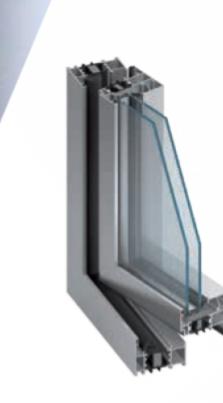

WINDOW & DOOR SYSTEM



MB-70 is a window and door system with very good parameters, giving the opportunity to meet the various needs of users. On the basis of the MB-70, it is possible to build high-rise structures thermal insulation MB-70HI and windows tilting to the outside MB-70 Casement.





SECURITY FOR BUILDINGS WITH SOLUTIONS BY ALUPROF





ALUPROF has received positive results for hurricane tests conducted in line with the American Society for Testing and Materials (ASTM) guidelines and Florida Building Code Testing Application Standards (TAS) 201-94, 202-94, and 203-94. The tests were carried out on the ALUPROF MB-SR50N facade system, MB-79N fixed and tilt-and-turn window system, and on the MB-45 fixed window system, which is widely used in the construction of buildings in the USA.

The testing process, which lasted for many hours, and the certifications it resulted in, confirm that ALUPROF's systems can be used in regions where there is a high risk of hurricanes, including the east coast of the USA and part of the State of New York. However, it should be borne in mind that some places may have further regulations as regards manufacturer certification or additional static calculations.













Florida Building Code TAS 202-94 Florida Building Code TAS 203-94

WINDOW & DOOR SYSTEM



MB-79N SI

The MB-79N SI is the latest cutting-edge, budget-friendly window and door system in the ALUPROF range. Introduced with a view to meeting heightened thermal insulation requirements, it is employed for a broad range of structures, including fixed, turn, tilt, tilt and turn, and tilt-and-slide windows, single and double exterior doors and storefront solutions with doors. In addition, this product range features the MB-79N CASEMENT system for outward-opening windows with a thermal break. The system passed positively structural Performance Tests.

Aluprof obtained positive results of hurricane tests conducted for the MB-79N system in accordance with ASTM guidelines and Florida Building Code TAS 201-94, TAS 202-94 and TAS 203-94.







Florida Building Code TAS 201-94 Florida Building Code TAS 202-94 Florida Building Code TAS 203-94



stay hopeful, stay prepared



WINDOW & DOOR SYSTEM

MB-37 SLIDE STORM

The MB-37 SLIDE STORM is a cutting-edge aluminum architectural system designed for sliding windows, offering enhanced mechanical strength. This new system from ALUPROF is the perfect solution for areas without thermal insulation requirements but needing superior mechanical strength. Ideal for patios, canopies, vestibules, ticket sales points, and other spatial structures, the MB-37 SLIDE STORM meets the stringent requirements of the Florida Building Code for hurricane zones.

Certified through TAS 201-94, TAS 202-94, and TAS 203-94 testing, the MB-37 SLIDE STORM adheres to current standards and regulations.





Perfect

for indoors and outdoors









Florida Building Code TAS 201-94 Florida Building Code TAS 202-94 Florida Building Code TAS 203-94

WINDOW & DOOR SYSTEM



MB-45

MB-45 is a modern aluminum system intended for designing elements of architectural exterior and interior enclosures that do not require thermal insulation, e.g. various types of partition walls, windows, manual and automatic sliding doors, swing doors, vestibules, display windows, ticket box offices, showcases and spatial structures. The system passed positively structural Performance Tests.

Aluprof obtained positive results of hurricane tests conducted for the MB-45 system in accordance with ASTM guidelines and Florida Building Code TAS 201-94, TAS 202-94 and TAS 203-94.





PRESIDENTIAL

DOORS & WINDOWS

Commercial | Hospitality | Residential ePVC & Aluminum Doors, Windows, Garage doors, Fences Metal roofing Call or text for a quote

+1 973.650.7143

ofice@pdw-llc.com

www.pdw-llc.com

